


Series Modular

Technical data sheet MJ-04



AC Power supply


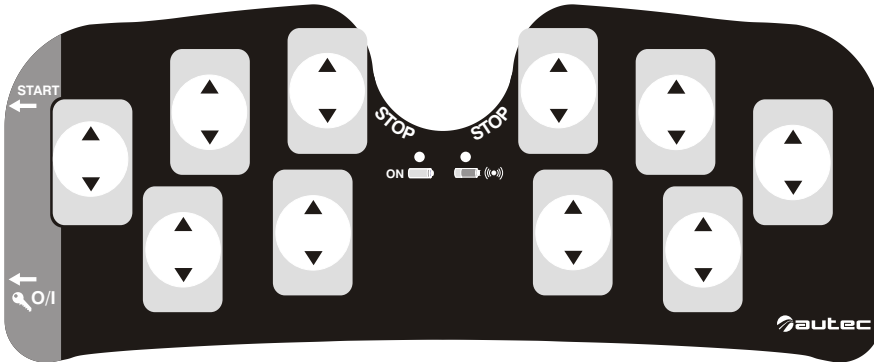


EACH SYSTEM INCLUDES

- Waist control unit
- Shoulder harness
- Customized panel serigraph
- Receiving unit (cable gland entry)
- Battery charger @ 80-250 Vac
- 2 rechargeable NiMH batteries
- User manual
- CE Declaration of conformity
- Warranty certificate

DRILLING TEMPLATE RECEIVING UNIT

- A = 150 mm
- B = 75 mm
- C = 357,5 mm
- D = 118,5 mm
- E = 167 mm
- F = 350,5 mm

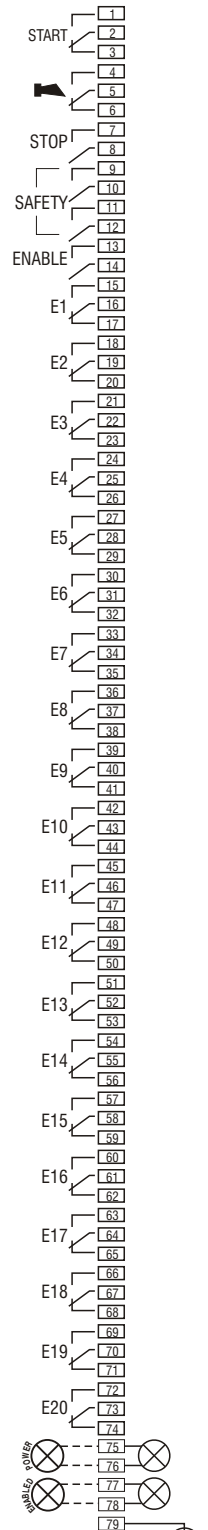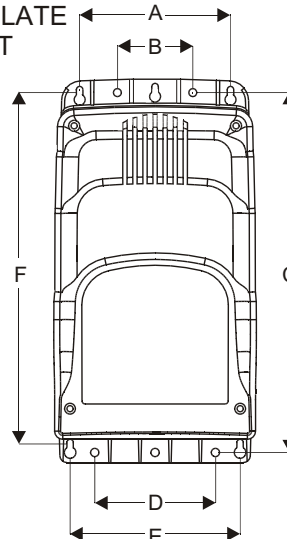

TECHNICAL FEATURES

Operating frequency (433MHz).....	UHF 433,075-434,775 MHz
Operating frequency (870MHz).....	UHF 869,7-870 MHz
Available radio channels (433MHz).....	16 automatic scan / 32 manual scan
Available radio channels (870MHz).....	12 automatic scan / 12 manual scan
Available outputs.....	20 (+ Start + Stop)
Operating range.....	100 m
Operating temperature.....	-20 °C - +70 °C
Protection degree.....	IP 65

Transmitting unit

Battery capacity (@ 20 °C).....	15 hrs (NiCd), 25 hrs (NiMH)
Dimensions.....	255x170x126 mm
Weight.....	1,3 Kg
Low battery warning.....	ca 7 minutes

Receiving unit

Power supply.....	24/48/55/110/220 Vac ± 20%
Stop relay contacts rating (AC-1).....	250V - 4A
Command relay contacts rating (AC).....	250V - 10A
Weight.....	3,5 Kg
Antenna.....	internal

