


Series Modular

Technical data sheet MJ-04



DC Power supply

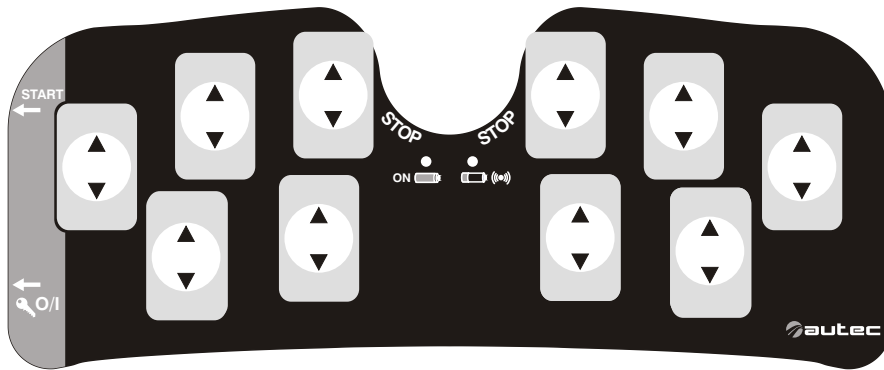


EACH SYSTEM INCLUDES

- Waist control unit
- Shoulder harness
- Customized panel serigraph
- Receiving unit (cable gland entry)
- Battery charger @ 80-250 Vac
- 2 rechargeable NiMH batteries
- User manual
- CE Declaration of conformity
- Warranty certificate

DRILLING TEMPLATE RECEIVING UNIT

- A = 150 mm
- B = 75 mm
- C = 357,5 mm
- D = 118,5 mm
- E = 167 mm
- F = 350,5 mm

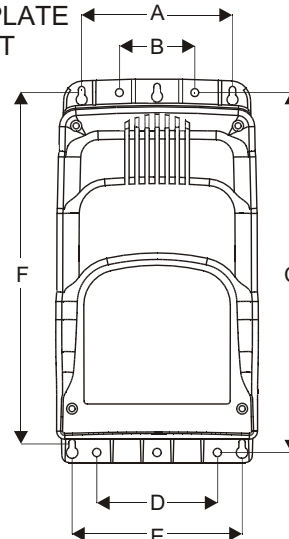

TECHNICAL FEATURES

Operating frequency (433MHz).....UHF 433,075-434,775 MHz
 Operating frequency (870MHz).....UHF 869,7-870 MHz
 Available radio channels (433MHz).....16 automatic scan / 32 manual scan
 Available radio channels (870MHz).....12 automatic scan / 12 manual scan
 Available outputs.....20 (+ Start + Stop)
 Operating range.....100 m
 Operating temperature.....-20 °C - +70 °C
 Protection degree.....IP 65

Transmitting unit

Battery capacity (@ 20 °C).....15 hrs (NiCd), 25 hrs (NiMH)
 Dimensions.....255x170x126 mm
 Weight.....1,3 Kg
 Low battery warning.....ca 7 minutes

Receiving unit

Power supply.....12 or 24 Vdc ± 25%
 Stop relay contacts rating.....30V - 10A
 Command relay contacts rating.....250V - 10A
 Weight.....3,5 Kg
 Antenna.....internal

