


Series Modular

Technical data sheet MJ-05



DC Power supply

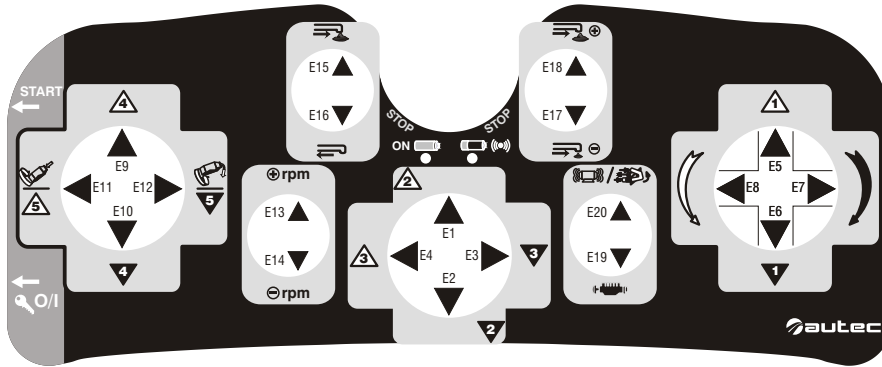


EACH SYSTEM INCLUDES

- Waist control unit
- Shoulder harness
- Panel serigraph
- Receiving unit (24 pole plug)
- Battery charger @ 10-30 Vdc
- 2 rechargeable NiMH batteries
- User manual
- CE Declaration of conformity
- Warranty certificate

DRILLING TEMPLATE RECEIVING UNIT

A = 150 mm
B = 75 mm
C = 357,5 mm
D = 118,5 mm
E = 167 mm
F = 350,5 mm

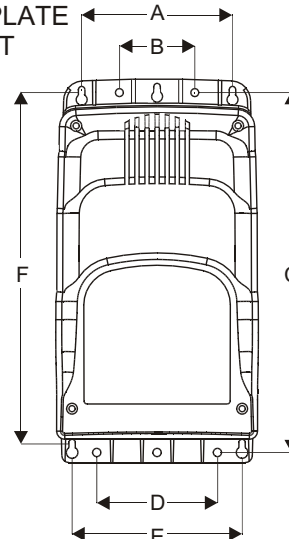

TECHNICAL FEATURES

Operating frequency (433MHz).....UHF 433,075-434,775 MHz
Operating frequency (870MHz).....UHF 869,7-870 MHz
Available radio channels (433MHz).....16 automatic scan / 32 manual scan
Available radio channels (870MHz).....12 automatic scan / 12 manual scan
Available outputs.....20 (+ Start + Stop)
Operating range.....100 m
Operating temperature.....-20 °C - +70 °C
Protection degree.....IP 65

Transmitting unit

Battery capacity (@ 20 °C).....15 hrs (NiCd), 25 hrs (NiMH)
Dimensions.....255x170x126 mm
Weight.....1,3 Kg
Low battery warning.....ca 7 minutes

Receiving unit

Power supply.....12 or 24 Vdc ± 25%
Stop relay contacts rating (DC).....30V - 10A
Command relay contacts rating (DC).....250V - 10A
Weight.....3,5 Kg
Antenna.....internal

